

Linear RF Amplifier

- Frequency Response: 88-250 MHz
- Linear Power: 10 watt
- Saturated Power: 25 watts
- Gain: 48 dB



Description:

Designed for linear application in the 88 to 250 MHz range. This amplifier utilizes RF Power MOSFET devices that provide high gain, wide dynamic range and an excellent 3rd order intercept point. Suggested applications: multi-carrier, pulse, AM & FM modulation.

ELECTRICAL SPECIFICATION @ VDD= +28VDC: Temp.=25°C, 50Ω System

0613

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	88		250	MHz
Power Output Saturated	P _{sat}		25		Watt
Power Output P-1dB	P _{-1dB}	16	20		Watt
Gain	G	45	48		dB
Small Signal Gain Flatness	ΔG			±1.0	dB
Input VSWR	S11		1.25:1	1.65:1	-
Harmonics: 88-150MHz / 175-250MHz,	H		-26 / -35	-22 / -28	dBc
Inter-modulation Point 2 Tones, 5W per tone @ 199 & 200 MHz	IP ₃		+52		dBm
Spurious Signals	dBc		-70	-60	dBc
Operating Voltage	Vdc	24	28	30	Volt
Operating Current @ 10 Watts	Amps		1.9	2.5	Amp
Enable / Disable (shut down pin: gnd=off, open=on)	ms	Typical 1ms OFF, 10ms ON.			ms

MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimensions	2.2 x 4 x 0.86	Max	Inch
RF Connectors IN/OUT	SMA	-	-
DC Connectors	Filtered feed-through	-	-
Cooling	Heat-sink not included	-	-
Weight		Max	lb


PROTECTIONS

Thermal Shutdown	Bi-metal switch set at 80°C with self reset.	Typ
Input Overdrive	-3dBm Max	Max
Load VSWR	6.0:1 up to 10 watts	Max
Reverse Polarity Protection	None	-


ENVIRONMENTAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Units
Operating Case Temperature	T _c	0°C		+70°C	°C
Storage Temperature	T _{stg}	-30°C		+100°C	°C
Relative humidity non-condensation	RH	95			%

Response Curve

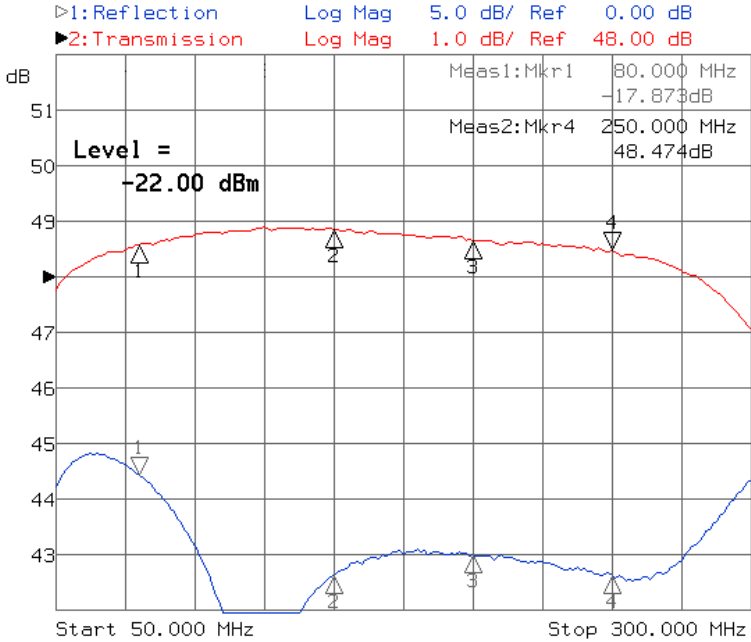


Small Signal Frequency Response Curve

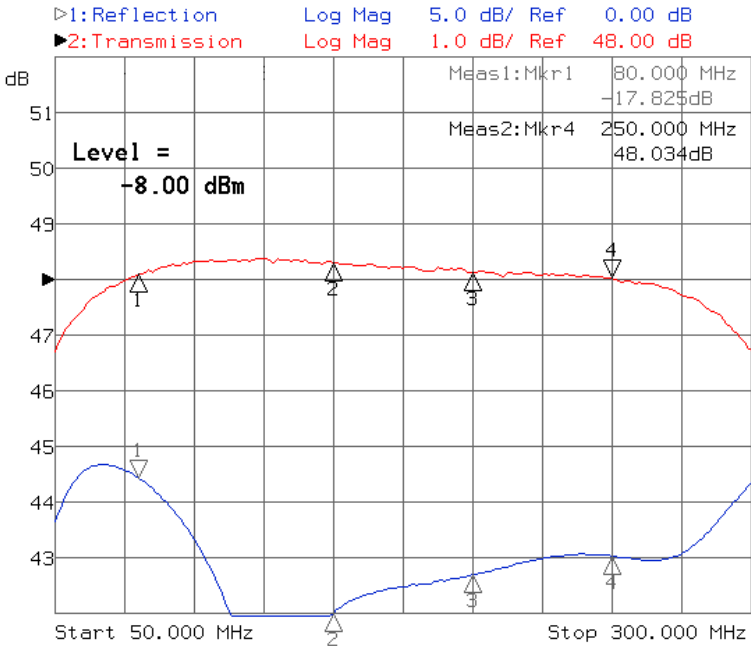


Frequency Response Curve @ 10 Watt Output

Response Curve

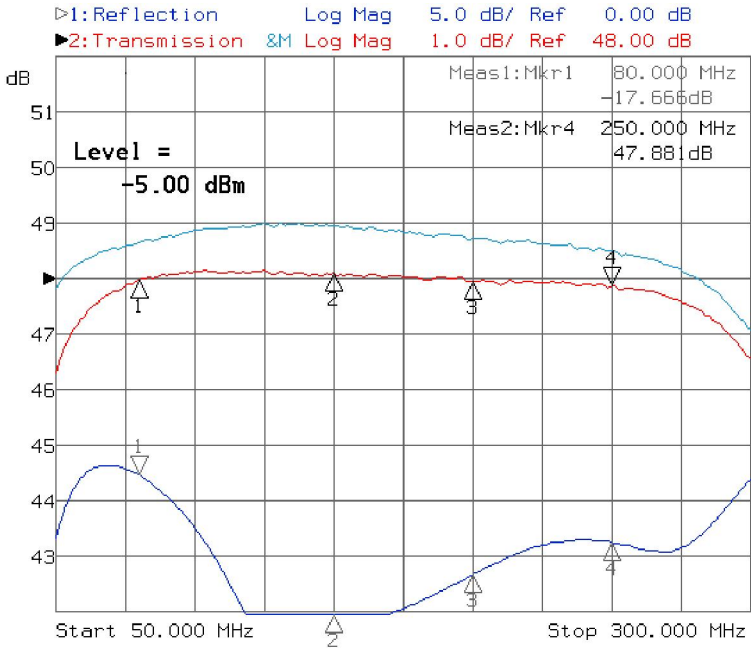

Compression at P-1 db

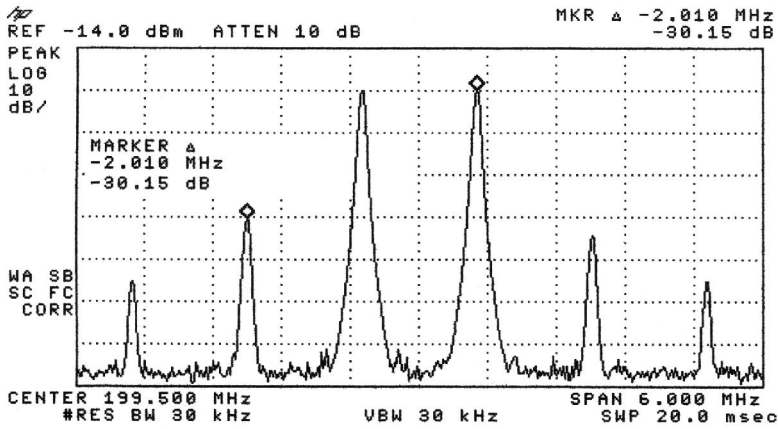

Two Tones 5 Watts Avg. per Tone @ 199 & 200MHz
IP3 = +52dBm

Outline Drawing

