


## 40 Watt Linear RF Amplifier

- Frequency Response: 20-520 MHz
- Usable Frequency Response 15-530 MHz
- Linear Power: 40 watts
- Sat. Power: 60 watts
- Gain: 45 dB

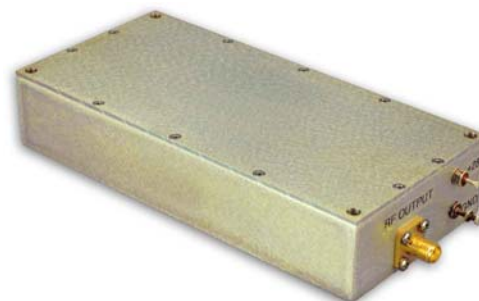

### Description:

Designed for linear applications in the 20 to 520 MHz range. This instrumentation amplifier utilizes class “A” and “A/B” RF Power MOSFET devices that provide high gain, wide dynamic range and an excellent 3<sup>rd</sup> order intercept point. Suggested applications: CW, multi-carrier, pulse, PM, AM & FM modulation.

### ELECTRICAL SPECIFICATION @ VDD= +28VDC: Temp.=25°C, 50Ω System

0309

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	20		520	MHz
Power Output Saturated	P <sub>sat</sub>	60			Watt
Power Output P-1dB	P <sub>-1dB</sub>		40		Watt
Gain	G	43	45		dB
Small Signal Gain Flatness	ΔG		±1	±1.3	dB
Input VSWR	S11		1.3:1	1.6:1	-
Harmonics @ 40 Watts, 2 <sup>nd</sup> /3 <sup>rd</sup>	H			-20/-30	dBc
Inter-modulation Point 2 Tones, 2W per tone @ 400 & 401 MHz	IP <sub>3</sub>		+54		dBm
Spurious Signals	dBc		-70	-60	dBc
Operating Voltage	Vdc	24	28	30	Volt
Operating Current @ 40 Watts / 60 Watts	Amps		7.5/8.6	10	Amp
Enable / Disable (shut down pin: gnd=off, open=on)	ms	Typical: 1ms OFF, 10ms ON.			ms

### MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimensions	5.30 x 2.50 x 1.05	Max	Inch
RF Connectors IN/OUT	SMA	-	-
DC Connectors	Filtered feed-through.	-	-
Cooling	4” Fan and Heat-sink.	-	-
Weight	8.5	Max	lb


### PROTECTIONS

Thermal Shutdown	Bi-metal switch set at 70°C with self reset.	Typ
Input Overdrive	Fold-back overdrive protection to 20 dBm.	Max
Load VSWR	Infinite up to 20 watts.	Max
Reverse Polarity Protection	Included	-


### ENVIRONMENTAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Units
Operating Case Temperature	T <sub>c</sub>	0°C		50°C	°C
Storage Temperature	T <sub>stg</sub>	-30°C		+100°C	°C
Relative humidity non-condensation	RH	95			%

**Response Curve**

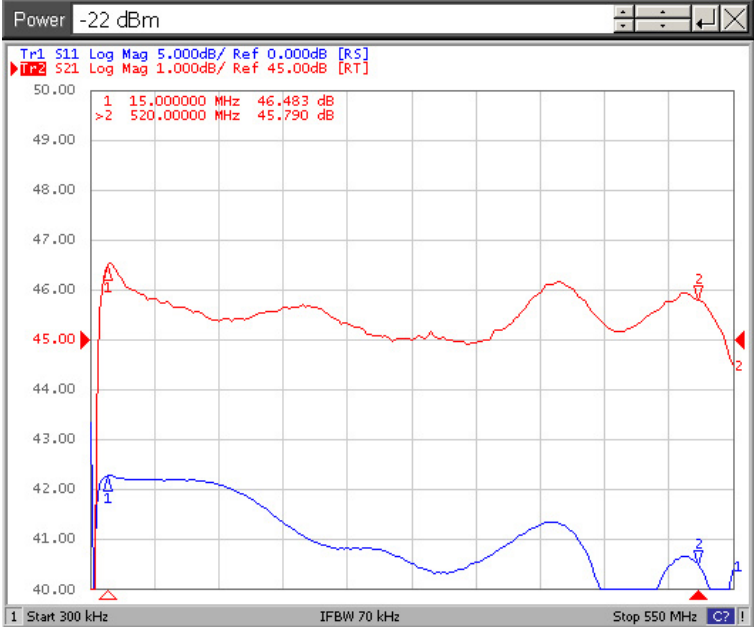


Small Signal Frequency Response Curve

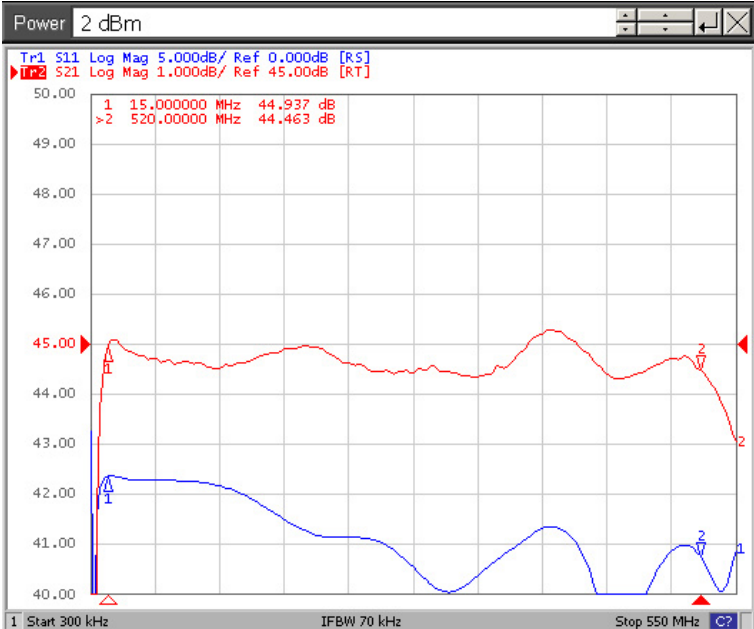


Frequency Response Curve @ 40 Watts Output

**Response Curves**


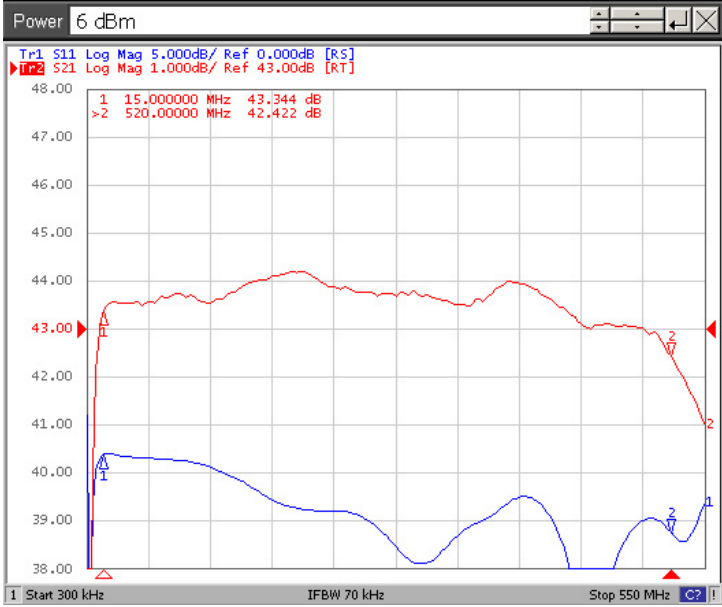


Frequency Response Curve @ 60 Watts Output

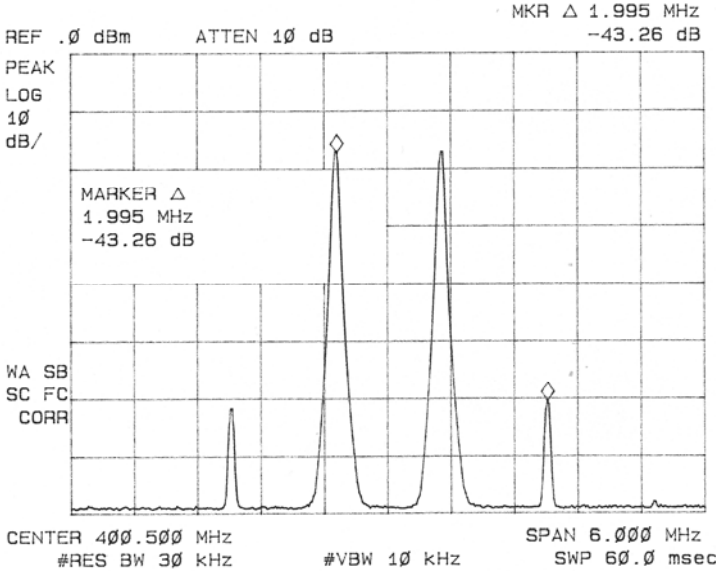


Two Tones 2 Watts Avg. Per Tone @ 400 & 401MHz  
 IP3 = +54dBm

## Response Curves

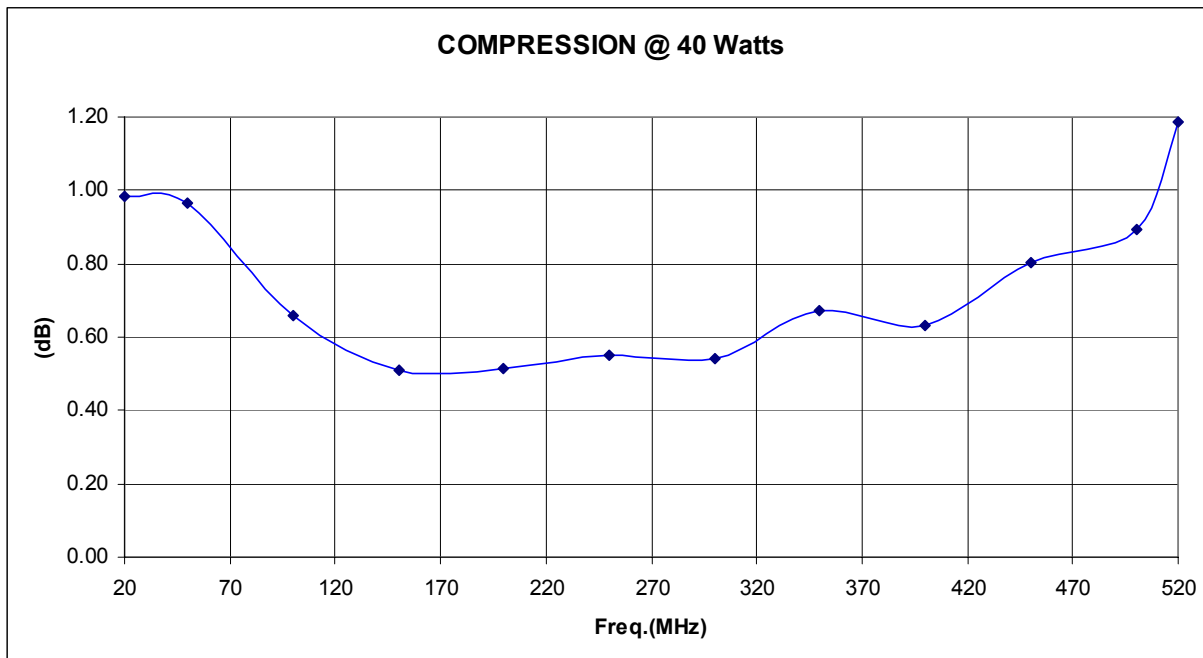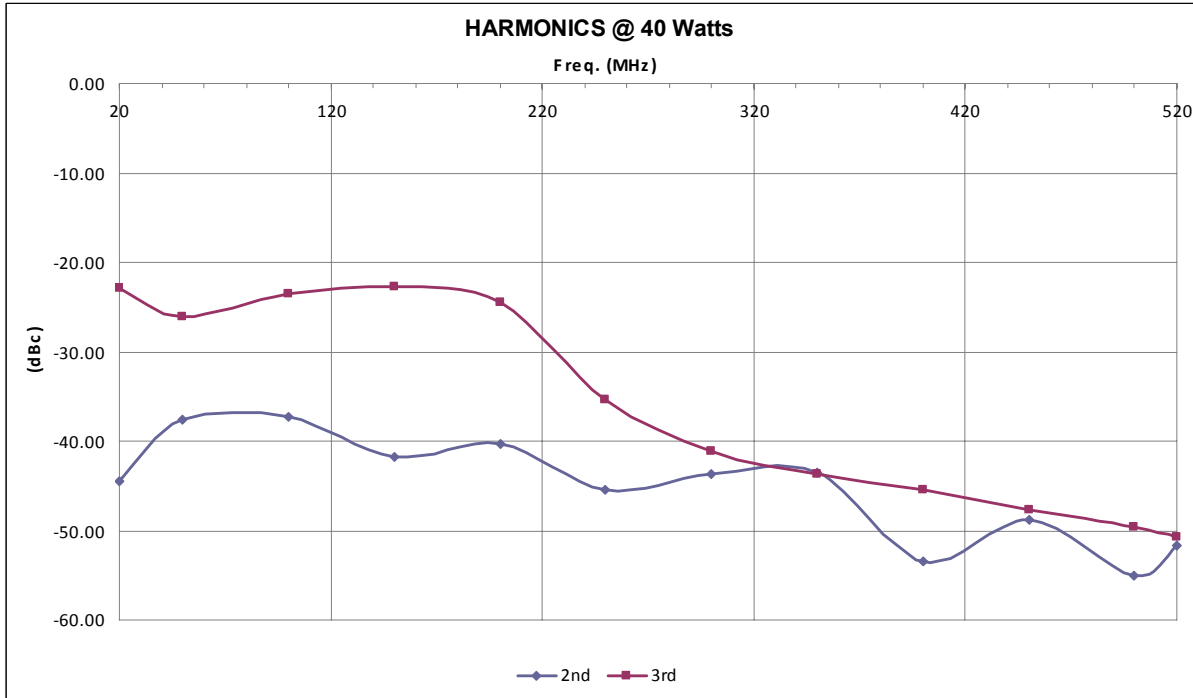

## Outline Drawing

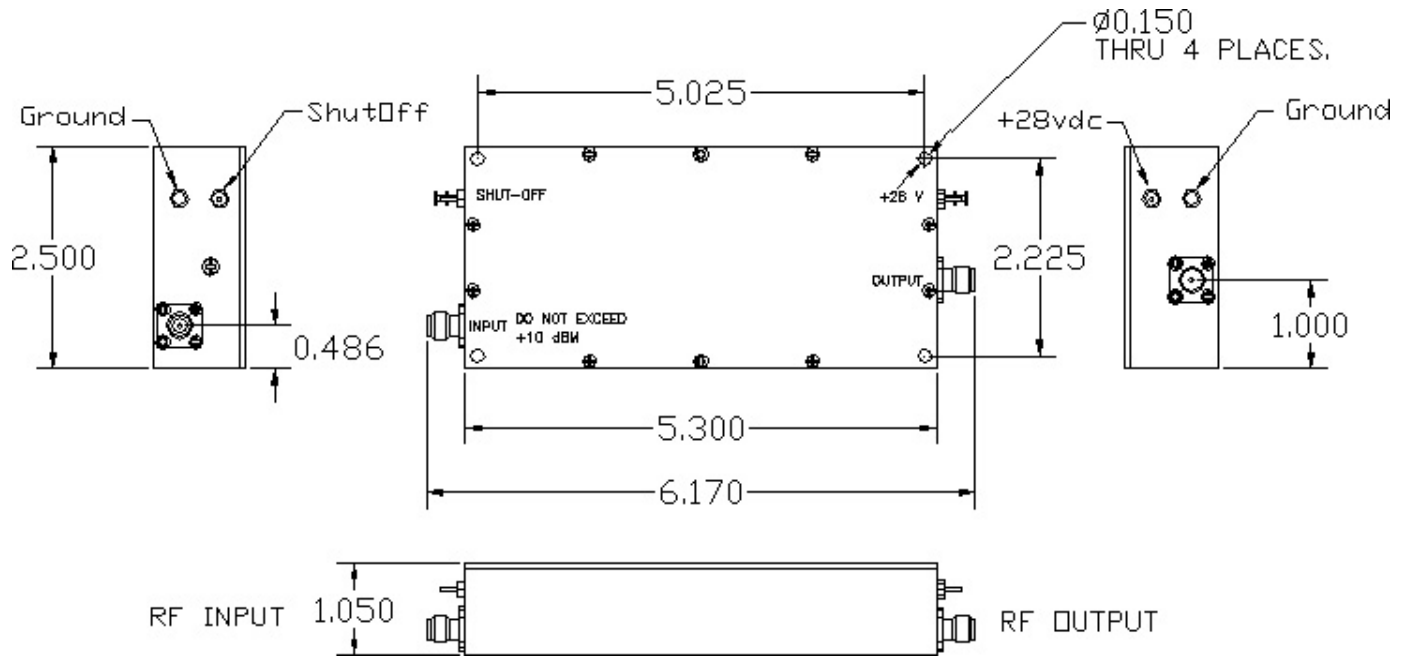

Also available on Heat-Sink.